


## multiflex Basic unit

Type: 12/250 · Model: XXX

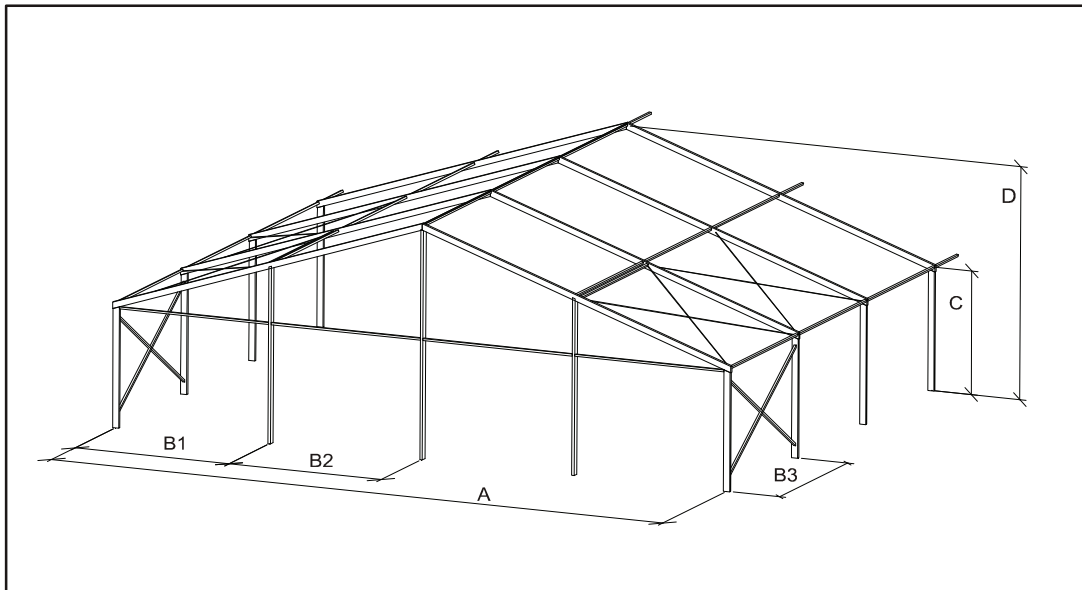

### System Measures

Width	(A)	12.07 m
Eave height	(C)	2.49 m
Ridge height	(D)	4.68 m
Peak height	(E)	0.00 m
Roof slope		20.00 °
Truss-distance	(B1)	3.04 m
Truss-distance	(B2)	3.00 m
Truss-distance	(B3)	3.00 m
Longest component		6.47 m
Truss profile		120 x 48 mm

### Technical Description

#### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

#### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

#### Ground Anchoring

Ground stakes or weight anchoring upon request

### Load Requirements/Technical Data

Wind load acc. to DIN 4112  
Min. length 12.00 m  
Max. length unlimited in truss distance

Subject to technical modifications!

Losberger GmbH  
Fürfeld · Gottlieb-Daimler-Ring 14  
74906 Bad Rappenau · Germany  
Phone: +49 7066 980-0  
Fax: +49 7066 980-232  
E-Mail: losberger@losberger.com  
www.losberger.com

Subsidiaries and Agencies Worldwide

