


multiflex Basic unit

Type: 15/230

Model: XXX

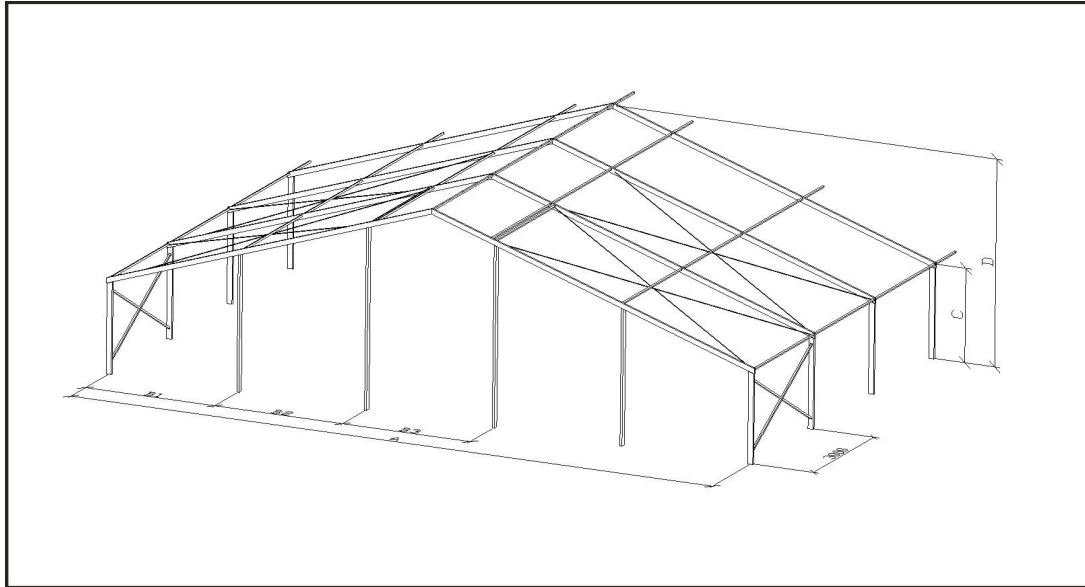

System Measures

Width	(A)	15,07 m
Eave height	(C)	2,29 m
Ridge height	(D)	4,94 m
Peak height	(E)	0,00 m
Roof slope		20,00°
Truss-distance	(B1)	3,04 m
Truss-distance	(B2)	3,00 m
Truss-distance	(B3)	3,00 m
Longest component		8,04 m
Truss profile		120 x 48 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112
Min. length 12,00 m
Max. length unlimited in truss distance

Losberger Intertent GmbH
Gottlieb-Daimler-Ring 14
D-74906 Bad Rappenau
Phone: +49 70 66 / 98 00
Fax: +49 70 66 / 98 23 2
e-mail: Losberger@Losberger.com
www.Losberger.com

Build on Quality
LOSBERGER

Subject to technical modifications!