


multiflex Pagoda/Sales

Type: 4x4/230

Model: 501

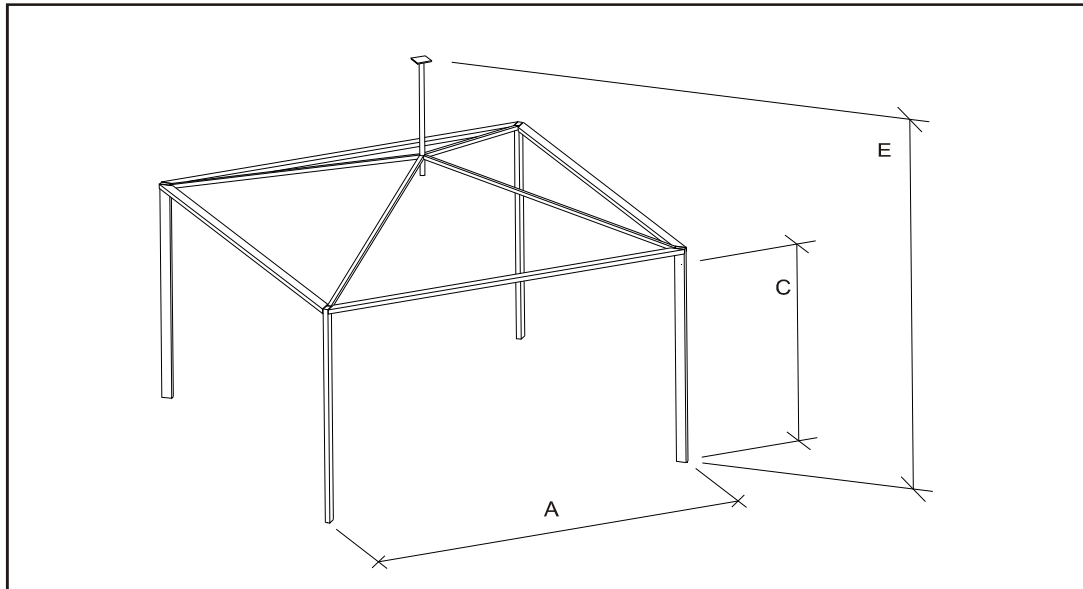

System Measures

Width	(A)	3,76 m
Eave height	(C)	2,25 m
Ridge height	(D)	0,00 m
Peak height	(E)	4,20 m
Roof slope		0,00°
Truss-distance	(B3)	0,00 m
Longest component		3,80 m
Truss profile		100 x 48 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112

Losberger Intertent GmbH
Gottlieb-Daimler-Ring 14
D-74906 Bad Rappenau
Phone: +49 70 66 / 98 00
Fax: +49 70 66 / 98 23 2
e-mail: Losberger@Losberger.com
www.Losberger.com

Build on Quality
LOSBERGER

Subject to technical modifications!