


## multiflex Basic unit

Type: 6/250

Model: XXX

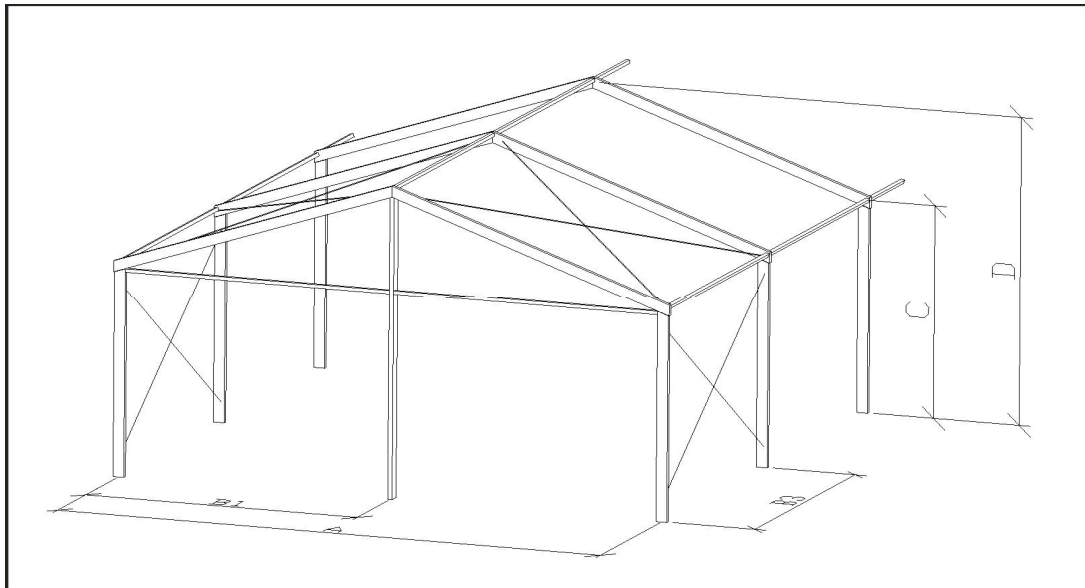

### System Measures

Width	(A)	6.07 m
Eave height	(C)	2.49 m
Ridge height	(D)	3.60 m
Peak height	(E)	0.00 m
Roof slope		20.00 °
Truss-distance	(B1)	3.04 m
Truss-distance	(B2)	0.00 m
Truss-distance	(B3)	3.04 m
Longest component		3.62 m
Truss profile		120 x 48 mm

### Technical Description

#### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

#### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

#### Ground Anchoring

Ground stakes or weight anchoring upon request

### Load Requirements/Technical Data

Wind load acc. to DIN 4112  
Min. length 6.00 m  
Max. length unlimited in truss distance

Subject to technical modifications!

Losberger GmbH  
Fürfeld · Gottlieb-Daimler-Ring 14  
74906 Bad Rappenau · Germany  
Phone: +49 7066 980-0  
Fax: +49 7066 980-232  
E-Mail: losberger@losberger.com  
www.losberger.com

Subsidiaries and Agencies Worldwide

